

ELP 1040VTS

Visitor Entry Phone System



The Condoplex ELP 1040 is the world's first Web-Enabled VOIP Entry Phone for multi residential and office towers. A Stylish 19" Portrait sized Gesture Controlled Touch Screen provides a modern look and feel to buildings. Multi-lingual Voice Prompts further enhance the user experience.

The ELP1040VTS provides Lobby Door and/or Elevator Floor restriction. A Stylish window below the main screen allows for the placement of multiple future reader technologies. A built-in Camera can read a temporary 2D Bar Code Pass displayed from a printout or Smartphone to grant access or call a resident or property manager immediately. The Camera will also detect the proximity of a caller and activate the screen, thus extending the life of the LCD.

Advanced calling features such as Dialcast (Calling several phones at one time and Call Scheduling permit this Entry Phone to accommodate today's connected lifestyle, where every family member carries a cellular phone.

- Linux O/S Web based Architecture
- Standalone or Networked
- Web Screen Interface
- External Low Voltage Supply for Retrofits
- VOIP / Digital Dialing Messaging Services
- Site Specific Web Services and Hot Buttons
- Remote Security and Advanced A/V Features
- Multi-Lingual Voice Prompts
- Background Music
- Internet/Intranet/PSTN Accessible
- Access/Elevator Control
- Automated Updates
- Future-proofed via Multi-reader bay
- Connects to CONDOPLEX Resident Portal
- Dedicate Emergency (EMS) Hot button

ELP 1040VTS

Visitor Entry Phone System

All events are logged with still or motion video capture for every visitor Accessing the Entry Phone. The Resident may: Allow Lobby and/or Elevator Access, Reject the Caller, or Conference a Concierge. Fully customizable Web Cloud Services are available, examples include: Location,Taxi Service, Transit Schedule, Weather and Customer Care.

Communications

The Entry Phone provides three modes of communication, PSTN Dial-up, VOIP and Non-Sub-Subscriber Services, thus permitting the lowest cost installation and highest possible features for any client. VOIP and Digital Dialer Services Permit 8 to 20 simultaneous Voice channels, thus eliminating BUSY signals and dramatically reducing phone line charges. A notification feature will dispatch an email with an image capture and voice message to the resident, whenever a visitor places a call. Two-way Audio/Video is available for off-site concierge.

Software

Web based, this product does not require any client software to be Installed on a PC. Changes to the directory may be made on-site over a LAN or remote from the Internet. Cloud services are available to provide automated back-up and monitor the health of your 1040. A concierge software is included to permit other services, such as speed dial for the guard, video monitoring and the issuing of 2D barcodes for visitors and contractors.

The 1040's Interface is so advanced that we believe it has created another Product category, the Tele-Kiosk.

Features

Vandal Proof Housing (ALL Stainless Steel Construction)

Surface or Recessed Mount

Indoor Or Outdoor Weatherproof Housing

Built-in UPS

Environmental Control

Netmonitor for Remote Health Monitoring

19" Touchscreen Display For Superior Graphics

Auto Visitor Detect/ LCD Screen Saver

Audio and Video Capable

Send/Receive Calls From Guard's Station

Remote Software Upgrades via Internet

On-site Concierge Software

Interfaces with CONDOPLEX Servers or

ELP780's or Low-Cost ELP520 Entry Phones

Optional

Internal Card Reader(s) For Resident Access

Internal Camera for Video Capture and Access


Postal Keylock for Mail Delivery

Indoor/Outdoor Wheel Chair Paddle

¹ Requires CONDOPLEX Phone Service

Specifications

Fascia Dimensions	16 3/8" (W) x 29 3/16" (H) x 5" (D) 41.59 cm (W) x 74.13 cm (H) x 12.7 (D) cm
Recessed Mount Back Box Dimensions	15 7/16" (W) x 28 1/4" (H) x 4 11/16" (D) 39.21 cm (W) x 63.97 (H) x 11.90 (D)
Surface Mount Back Box Dimensions	16 1/2" (W) x 29 3/8" (H) x 4 29/32" (D) 39.21 cm (W) x 63.97 (H) x 11.90 (D)

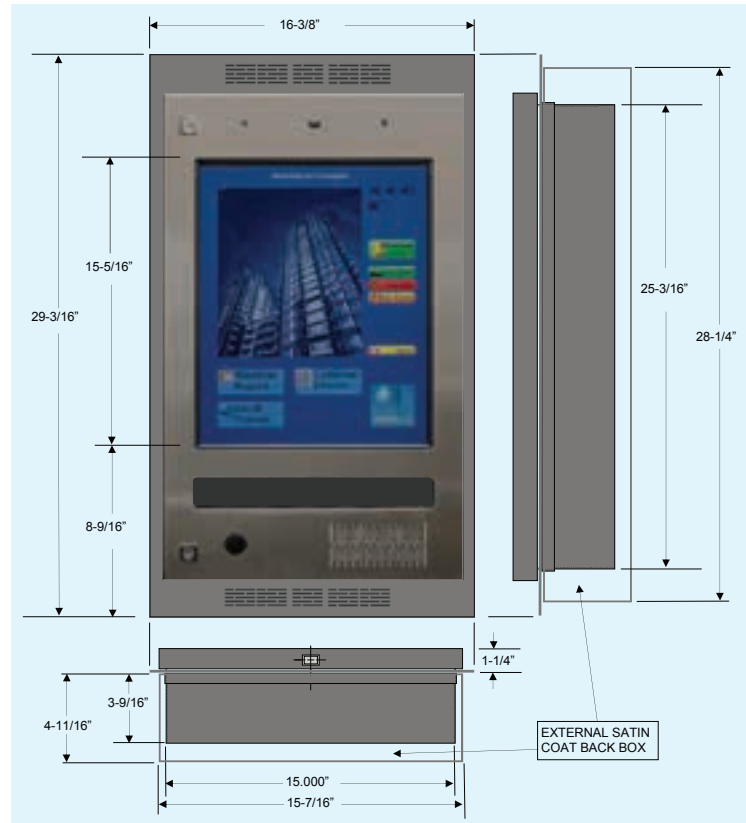

Shipping Weight	35 lbs (14kg)
Input Voltage	120VAC @ 3A UPS
Mounting Requirement	1040 Trim Ring (Painted or Stainless) for recess mount
Material Finish	High Grade 316 Stainless Steel // Vandal Proof Housing
Protocol	100mb Ethernet (Linux); VOIP; RS485 to Slave Devices
Relay Output	2 x 3A for MagLocks, Door Strikes or External Camera Lock
Display	19" TFT Color Touch Screen
User Calling Operation	Gesture Based Touch Screen
Audio Output	Adjustable – 2.0 watts
Voice Communication	HandsFree Mode to Suite Panel ; Telephone System; Guard Station and Guard Phone
Directory Listings	Unlimited
Ordering Information	ELP1040VTS Indoor Recessed ELP1040VTO Outdoor Recessed ELP1040IPA, ELP1040IPS Indoor Pedestal ELP1040OPA, ELP1040OPS Outdoor Pedestal
Options	Internal Card Reader; Wheel Chair Paddle

Features and Specifications subject to change without notice • Contact your Condoplex dealer to select features best suited for your facility and budgetary needs.