



Suite Intercoms

RE2G / REPS1 / RE2 / RE1



The RE series of intercom stations are connected onto the network through the In-suite security panels. All Models will generate an emergency alarm at the security desk, when their push buttons are pressed or chords pulled. Every model (IREPS1 excluded) will also automatically open an intercom channel to the guard. This permits the guard to initiate a conversation with the resident requesting emergency assistance to verify and respond immediately.

- 1 or 2 Gang Mount
- 1 Button Initiates Emergency Call
- 1 Button Arming (Re2 Only)
- 1 Door Bell (Re2g Only)
- For use in Bedrooms, Washrooms, Patios
- Elevator Vestibules (Re2g Only)
- Max 2 per suite.

The RE series is ideal for situations where voice communications with the suite panel may not be possible such as in a washroom or bedroom or patio (must be sheltered). The Re2 is identical in operation to the RE1 with the additional convenience of permitting remote arming of the suite. These units are extremely cost effective extensions of the suite panel and are easily mounted in a single gang box. The RE2G product is ideal for "loft" suite designs or for Condominiums where a separate elevator vestibule exists off the suite. When the resident pushes the door bell button the suite panel will chime. If 2 vestibules are available a different chime annunciates for each location. In large suites the chime may be forwarded to multiple suite panels. Should a visitor require emergency assistance, pressing a button will generate an alarm at the security desk with full audio communication. The REG2 is mounted in a two gang electrical box outside of the suite.


Features

- Vandal Proof Housing (Stainless Steel Cover)
- Indoor Or Outdoor Weatherproof Housing (Designed For Extreme Weather)
- High Contrast 19" Touchscreen Tft Display
- For Superior Graphics
- Hands Free Full Duplex Audio Communications (To Condoplex Resident Suite Panels, Resident Phones Or Concierge Desk)
- Unlimited And Private Resident Listings
- Full Audit Trail Capability
- High Security With Multiple Security Levels
- Remote Software Upgrade Via Internet
- Remote Diagnostcs For Service Personnel
- 'Stand Alone' Or 'Networked' Configuration

Optional

- Internal Card Reader For Resident Access
- Internal Camera For Added Security
- Postal Keylock For Mail Delivery

System Architecture

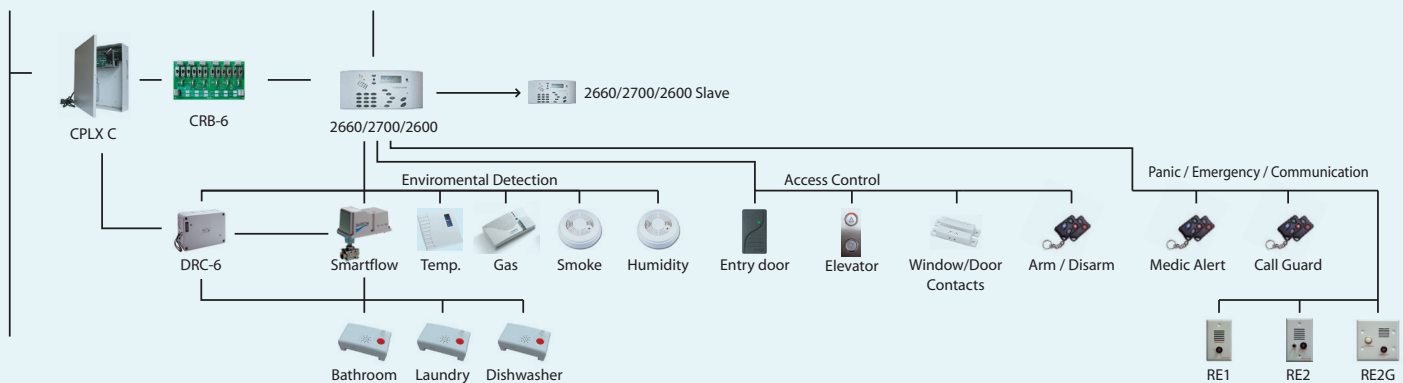

Specifications

Dimensions

Reps1/Re1/Re2	11.6 cm (W) x 11.6 cm (H) x 5mm (D) 4.55 in (W) x 4.55 in (H) x .19 in (D)
Re2g	11.6 cm (W) x 11.6 cm (H) x 5mm (D) 4.55 in (W) x 4.55 in (H) x .19 in (D)

Shipping Weight

Reps1/Re1/Re2	2.0g /1.85 oz.
Re2g	59.0g /2.0 oz

Operating Temp.	-40°C/-40°F to 85°C/185°F
Power Requirement	Powered by SP2600G/-60/2700G
Wiring:	Reps1/Re1/Re2/Re2G 2 Pair/2 Pair/3 Pair /4 Pair

Accessories:	SP600G/-60/2700G Video Panel
Ordering Information:	Re1 (one button) / Reps1 (Pull Chord) Re2 (two button) Re2g (Door Bell + Button)

Features and Specifications subject to change without notice • Contact your Condoplex dealer to select features best suited for your facility and budgetary needs.